CITY OF LOS ANGELES DEPARTMENT OF CITY PLANNING ZONING INFORMATION FILE

Effective Date: January 16, 2009

ZI NO. 2399 NORTHEAST HILLSIDES ZONE CHANGE ORDINANCE ORDINANCE NO. 108,403

COUNCIL DISTRICT: 1 & 14

COMMENTS:

The Northeast Los Angeles Hillsides Zone Change Ordinance (No. 180,403; effective date: January 16, 2009) establishes new regulations for properties in the adopted hillside area boundary in the Northeast Los Angeles Community Plan. There are approximately 11,000 properties impacted by the ordinance in the following zones: OS, A1, RE40, RE20, RE9, RS, R1, R2, RD6, RD5, RD4, RD3, RD2, RD1.5, C1, and PF. The regulations focus on size, height, retaining walls and grading limitations.

INSTRUCTIONS:

Vested Development Plans

This ordinance does not apply to development plans submitted for plan check prior to January 16, 2009 and vested under the provisions of Section 12.26 A. 3 of the Los Angeles Municipal Code.

Project For Which This Ordinance Applies

Development plans submitted for plan check on or after January 16, 2009 shall be reviewed in accordance with the limitations outlined in the Northeast Los Angeles Hillsides Zone Change Ordinance (No. 180,403). A copy of the adopted ordinance is attached to this ZI.

CLEARANCE INFORMATION:

The following are required for submission for clearance to the <u>Department of Public Works – Bureau of Street Services – Urban Forestry Division</u>:

- A. Landscape plans with plant legend (Retaining walls and building understory areas must be shown in plan, sections/elevations and identify plantings/planting materials used for screening)
- B. Tree report from licensed professionals

Applicants must obtain an approved Tree Report letter from the Department of Public Works – Bureau of Street Services – Urban Forestry Division in order to obtain clearance(s) from Department of City Planning.

The following are required for submission for clearance to the <u>Department of City Planning</u> (as described on form number CP13-3627):

C. One set of color photographs mounted on 8.5" x 11" cardstock or paper equivalent. It is very important to take as many pictures to illustrate the property and issues surrounding

- the property. They should include pictures of every lot for a distance of 200 feet, with an index map indicating where the photographs were taken.
- D. Complete Architectural Drawings (See H below for details).
- E. Samples of all exterior building materials and colors with manufacturer's specifications sheets and/or brochures.
- F. For projects with new construction that is in substantial compliance with the requirements for the U.S. Green Building Council's (USGBC) Leadership in Energy and Environmental Design (LEED®) for Homes program at the "Certified" level or higher, the applicant shall provide:
 - (1) Completed U.S. Green Building Council's (USGBC) Leadership in Energy and Environmental Design (LEED[©]) Project Registration Form;
 - (2) Receipt or other proof of payment issued by the USGBC;
 - (3) Completed the LEED[©] for Homes Project Checklist (prepared by USGBC-contracted LEED[©] for Homes Provider);
 - (4) Signed declaration from the USGBC-contracted LEED[©] for Homes Provider; and,
 - (5) Complete set of plans with:
 - o each sheet stamped and signed by a licensed architect or engineer;
 - each sheet stamped and signed by the USGBC-contracted LEED[©] for Homes Provider;
 - o copy of LEED[®] for Homes Project Checklist on plan sheets;
 - copy of signed declaration from the USGBC-contracted LEED[®] for Homes Provider on plan sheets; and
 - o measures being provided for LEED® Certification clearly identified and indicated

For more information on LEED[©] for Homes Program, as well as copies of the LEED[©] forms mentioned above please go to the USGBC's website (www.usgbc.org).

If changes are made to the project, the applicant shall be required to submit a revised set of plans, including the four requirements listed above, with all revisions necessary to make the project in substantial compliance with the requirements for LEED® Certification.

G. Approved Tree Report letter from Dept of Public Works – Bureau Of Street Services - Urban Forestry Division.


PLAN SUBMITTAL - REQUIRED MATERIALS TO BE SUBMITTED TO LADBS:

- H. Complete Architectural Drawings (one full size set stapled and edge bound & one 11"x17") with respective professional license stamp(s) and accurate date, including, but not limited to having the following:
 - 1. Site plan at a minimum of 1/8 inch scale, fully dimensioned
 - 2. Grading plan showing new and existing 1-foot contour intervals

- 3. Site survey by a licensed surveyor showing project boundaries and 1-foot contour intervals
- 4. FAR Calculations delineated on plans using the chart/formula below:

		Multiplying Factors by Zone and Slope Interval							
Area	Slope Interval (%)	RD1.5, RD2	R2, RD3, RD4, RD5, RD6	R1	RS	RE9	RE20	RE40	A1
Α	0-15	1.00	0.75	0.50	0.45	0.40	0.35	0.35	0.25
В	15-30	0.90	0.65	0.45	0.40	0.35	0.30	0.30	0.20
С	30-45	0.80	0.55	0.40	0.35	0.30	0.25	0.25	0.15
D	45-60	0.70	0.45	0.35	0.30	0.25	0.20	0.20	0.10
Е	60-100	0.60	0.35	0.30	0.25	0.20	0.15	0.15	0.05
F	100+	0.50	0.25	0.00	0.00	0.00	0.00	0.00	0.00

- 5. Complete floor plans at minimum 1/4 scale, fully dimensioned and indicate finish floor height
- 6. Complete elevations of existing and proposed structures, indicating materials, dimensions, etc.
- 7. Roof plan at minimum 1/4 scale.
- 8. Retaining Wall Schedule with each freestanding retaining wall labeled with all relevant details including height, length, width and materials used.
- 9. Section drawings through specific areas of the project to illustrate relationship parallel and perpendicular to the natural hillside.
- 10. If located along a ridgeline identified on "Northeast LA Ridgelines" map with 50' buffer delineated on all site plans. See below:

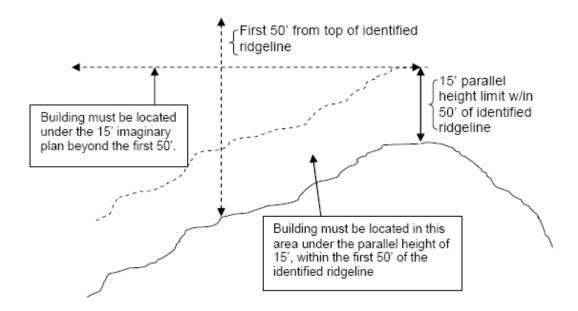

- 11. Architectural detail sheet, showing all applicable design elements.
- 12. Landscape & irrigation plan with plant legend consisting of drought tolerant and/or native plant material that is fire retardant & erosion controlling. Landscaping on any proposed retaining walls must also be included on landscape plans. Retaining walls and building understory areas must be shown in plan, sections/elevations and identify plantings/planting materials used for screening. New hardscape areas shall be called out on landscaping plans labeling the permeable paving systems such as pavers, porous asphalt, porous concrete, grasscrete and/or similar materials as approved by LADBS.
- I. Soils report and from licensed professionals and approved Soils and Geology Grading Letter from LADBS Grading Division.
- J. Signed "Certificate of Completion of Installation of Landscape" by certified arborist or licensed landscape architect (attached as last page of this document for your reference).

For additions with cumulative residential floor area of less than 500 square feet constructed after the effective date of this ordinance, or remodels of buildings built prior to the adoption of this ordinance, the existing residential floor area shall be the same as the building square footage shown on the most recent Los Angeles County Tax Assessor's records at the time the plans are submitted to the Department of Building and Safety and a plan check fee is paid. Except that residential floor area may be calculated as defined in Section 12.03 of the LAMC when a complete set of fully dimensioned plans with area calculations of all the structures on the lot, prepared by a licensed architect or engineer, is submitted by the applicant.

Any work that does not qualify as a remodel, as defined in the paragraph below, or additions that are 500 square feet or larger shall require a complete set of fully dimensioned plans with area calculations of all the structures on the lot prepared by a licensed architect or engineer.

For the purposes of implementing this subdivision, a remodel shall mean the alteration of an existing building or structure provided that at least 50 percent of the perimeter length of the contiguous exterior walls and 50 percent of the roof are retained.

In addition to those [Q] Conditions listed in this ordinance, the [Q] Conditions pursuant to Ordinances 166,216, 166,267, 179,344 shall be retained.

EXCEPTIONS:

Clarifications of these Permanent "Q" Qualified Classifications should be processed through Zoning Administrator Adjustments, pursuant to Section 12.28 of the Los Angeles Municipal Code, whereby up to twenty percent increases in height and up to ten percent increases in residential floor area may be requested.

Any work that does not qualify as a remodel, as defined in the paragraph below, or additions that are 500 square feet or larger shall require a complete set of fully dimensioned plans with area calculations of all the structures on the lot prepared by a licensed architect or engineer.

For the purposes of implementing this subdivision, a remodel shall mean the alteration of an existing building or structure provided that at least 50 percent of the perimeter length of the contiguous exterior walls and 50 percent of the roof are retained.

If you have any questions regarding this matter, please contact the Community Planning Bureau, Northeast Unit staff at (213) 978-1168.

and the

180403

ORDINANCE NO.

An ordinance amending Section 12.04 of the Los Angeles Municipal Code by amending the zoning map.


THE PEOPLE OF THE CITY OF LOS ANGELES DO ORDAIN AS FOLLOWS:


SECTION 1. Section 12.04 of the Los Angeles Municipal Code is hereby amended by changing the zone classifications on properties shown upon portions of the zoning maps titled "Zone Change Ordinance Map Northeast Los Angeles Hillsides Zone Change" and the table for Section 1 below and incorporated herein by this reference, and made a part of Article 2, Chapter 1 of the Los Angeles Municipal Code.


Table for Section 1

	·		
Existing Zone	New Zone		
OS-1XL-HPOZ	[Q]OS-1XLD-HPOZ		
OS-1XL	[Q]OS-1XLD		
A1-1	[Q]A1-1D		
A1-1XL	[Q]A1-1XLD		
RE40-1	[Q]RE40-1D		
RE20-1	[Q]RE20-1D		
RE9-1	[Q]RE9-1D		
RS-1	[Q]RS-1D		
R1-1-HPOZ	[Q]R1-1D-HPOZ		
R1-1	[Q]R1-1D		
R2-1-HPOZ	[Q]R2-1D-HPOZ		
R2-1	[Q]R2-1D		
RD6-1	[Q]RD6-1D		
[T][Q]RD6-1	[T][Q]RD6-1D		
RD5-1	[Q]RD5-1D		
[Q]RD5-1	[Q]RD5-1D		
RD4-1-HPOZ	[Q]RD4-1D-HPOZ		
RD3-1-HPOZ	[Q]RD3-1D-HPOZ		
RD3-1	[Q]RD3-1D		
RD2-1	[Q]RD2-1D		
RD1.5-1	[Q]RD1.5-1D		
(T)(Q)RD1.5-1	(T)[Q]RD1.5-1D		
C1-1	[Q]C1-1		
PF-1	[Q]PF-1D		

SECTION 2. Pursuant to Section 12.32 G of the Los Angeles Municipal Code, and any amendment thereto, the following limitations are hereby imposed upon the use of that property described in Section 1 hereof which are subject to the Permanent "Q" Qualified Classification. Clarifications of these Permanent "Q" Qualified Classifications should be processed through Zoning Administrator Adjustments, pursuant to Section 12.28 of the Los Angeles Municipal Code, whereby up to twenty percent increases in height and up to ten percent increases in residential floor area may be requested. Where the zone symbols of the new zoning designation as shown in the

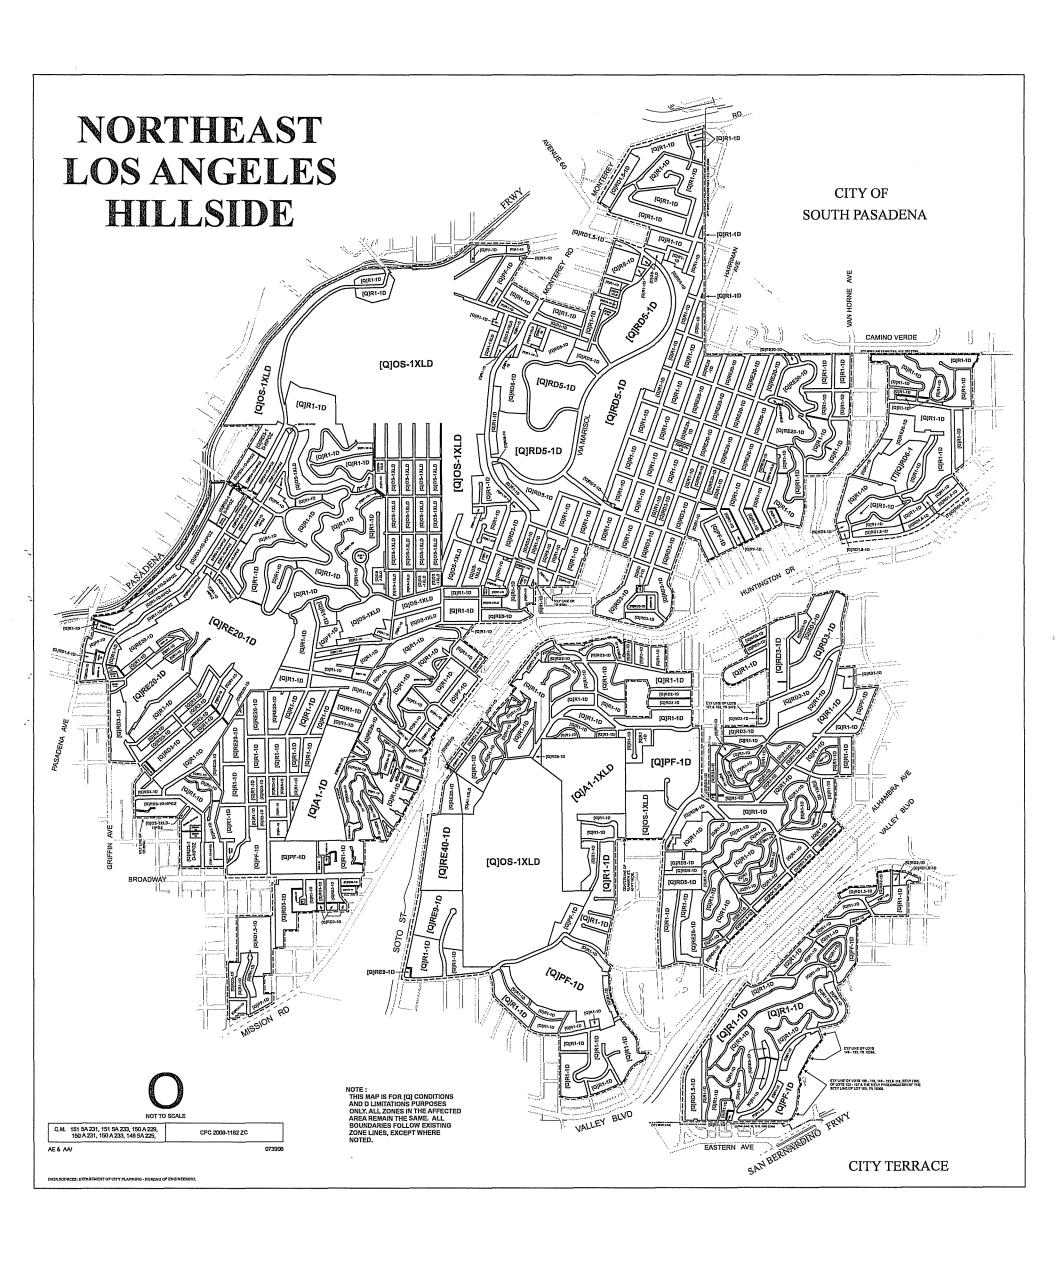

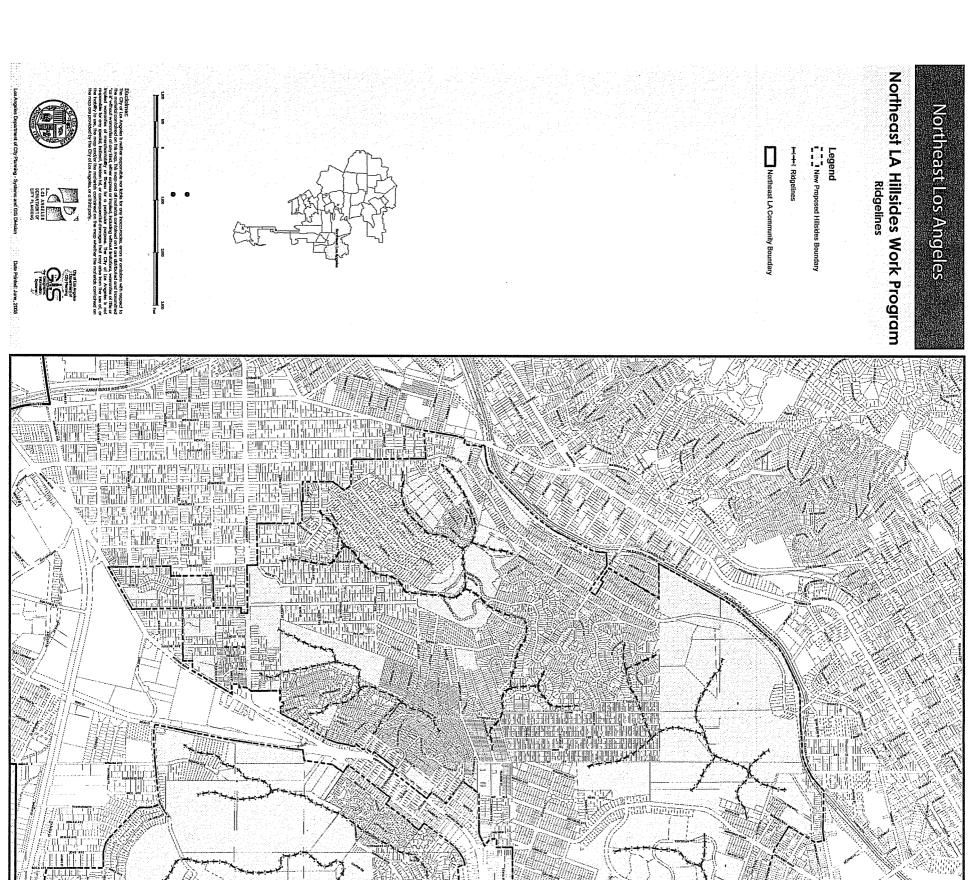

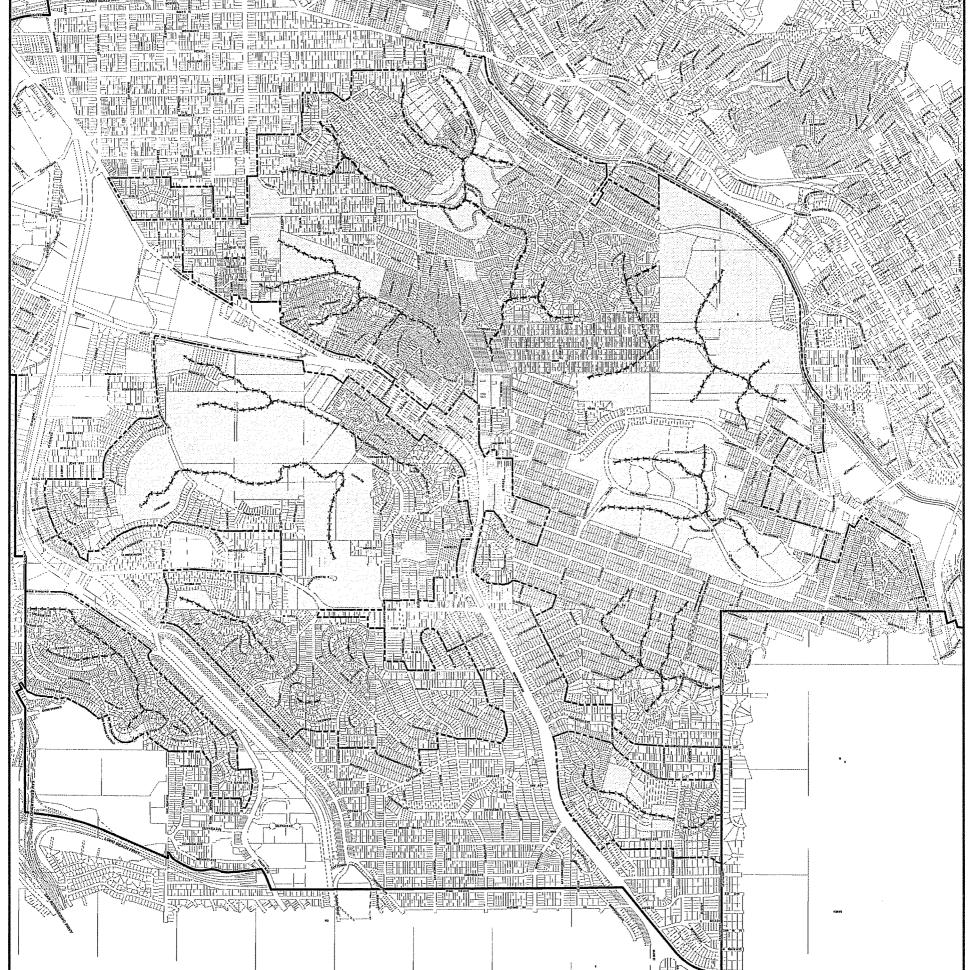

CPC-2008-1182-ZC Page 2

table for Section 1, are preceded by the symbol "Q" in brackets, the conditions and limitations imposed by the new "Q" Qualified Classification are set forth as follows:

A. All properties located within the Zone Change Ordinance Map shall be subject to the following [Q] Conditions:

1. Infrastructure

- a. Construction materials and equipment shall not be permitted to be stored in the public right-of-way in any manner that reduces roadway clearance to less than 20-feet in width. Storage of construction materials and equipment on public property requires a street use permit from the Bureau of Street Services.
- b. Construction vehicles shall be subject to the restrictions established by the Los Angeles Fire Department Red Flag - No Parking Program. Restricted parking signs shall be procured and installed along the project site at the owner/developer's expense when required by the LAFD and/or LADOT.

2. Building Design

- a. Second story setbacks or terraced structures and other design articulations are to be used to ensure that new development is compatible with existing neighborhood identity, character and scale.
- b. Building materials match architectural style of new development.
- c. Architectural design elements of the front and rear building elevations including articulation of facades, modulations of walls, shape, type details and the location of windows, doors, columns, balconies and garage doors vary from the adjacent/abutting buildings.
- d. Design of new structures shall meet one of the following standards:
 - (1) The total residential floor area of each story other than the base floor in a multi-story building does not exceed 75 percent of the base floor area, where "Base Floor" and "Floor Area, Residential" shall be defined as set forth in Section 12.03 of the Los Angeles Municipal Code for the purposes of this regulation; or
 - (2) The cumulative length of the exterior walls facing the front lot line, equal to a minimum of 25 percent of the building width shall be stepped-back a distance of at least 20 percent of the building depth from a plane parallel to the lot width established at the point of the building closest to the front lot line. When the front lot line is not straight, a line connecting the points where the side lot lines and the front lot line intersect shall be used. When through-lots have two front yards, the step-back shall be provided along both front lot lines; or

- (3) The buildings of the project shall consist of 3 or more building elements, each with its own associated roof form. A building element may also be a major horizontal mass, setback, or forward from the face of other masses.
- e. Structures within 50 linear feet of identified ridgelines, as shown on attached map marked 'Northeast LA Ridgelines', are limited to one story or 15 feet in height. The 50 linear feet must be labeled on all plans accordingly. No structure shall exceed a height in excess of 15 feet above the identified ridgeline. The precise ridgelines shall be verified and identified on the required topographic survey, prepared by a licensed surveyor.
- f. New hardscape areas, not including foundations, shall utilize permeable paving systems including, but not limited to pavers, porous asphalt, porous concrete, grasscrete and/or similar materials as approved by LADBS.

3. Retaining Walls

- a. The maximum total height of all freestanding retaining walls shall not exceed 12 feet, with no individual wall measuring higher than 6 feet on private property. Each freestanding retaining wall shall not exceed 75 feet in linear length, nor extend beyond one lot. Walls shall be separated by a minimum horizontal distance equal to the height of the highest wall. Freestanding garden walls 36" in height or less shall not be considered retaining walls for the purposes of this regulation.
- b. Require that all retaining walls provide a standard surface backdrain system and all drainage shall be conducted to the street in a non-erosive device, as required by approved Soils Report.

4. Landscaping

- Landscaping palette for required landscape plans shall be comprised of drought tolerant and/or native plant material that is fire retardant and controls erosion.
- b. Retaining walls and building understory areas shall be fully screened with plantings in a reasonable amount of time, as shown on approved landscape plan
- c. Landscape plans must be submitted to Bureau of Street Services Urban Forestry Division prior to DCP clearance. Upon satisfaction of the requirements set forth under LAMC Ordinance No. 177,404 (Protected Trees) deemed necessary by the Urban Forestry Division, an approval letter will be issued by the Urban Forestry Division and submitted with new development filings as part of submission packages.

CPC-2008-1182-ZC

d. Landscaping plans must be submitted to Bureau of Street Services, Urban Forestry Division, and Department of City Planning for review and approval consistent with LAMC Ordinance No. 177,404 (Protected Trees).

Page 4

e. A signed "Certified Arborist's or Licensed Landscape Architect's Certificate of Compliance" must be filed with the Department of Building & Safety prior to issuance of a "Certificate of Compliance" to ensure that landscaping plans are fully implemented.

Environmental

- a. A Geotechnical Investigation Report that evaluates the proposed project's soil and grading shall be submitted to the LADBS Grading Division for review. An approved Soils & Grading report letter from LADBS – Grading Division shall be required prior to approval of a grading, foundation or building permit.
- b. Grading shall be done in accordance with the Planning Guidelines Landform Grading Manual adopted by the City Council.
- c. All new graded slopes shall be no steeper than 2:1 (rise:run), except when the Grading Division has determined that slopes may exceed 2:1 as part of an approved Soils Report.
- d. Grading shall be limited to a maximum of 500 cubic yards + numeric value equal to 5 percent of the total lot size, up to a maximum of 1,000 cubic yards total. Any deviations beyond these limits shall require a Zoning Administrator's approval under LAMC §12.27.
- e. New hardscape areas, not including foundations, shall utilized permeable paving systems including, but not limited to pavers, porous asphalt, porous concrete, grasscrete and/or similar materials as approved by LADBS.
- B. In addition to those [Q] Conditions listed under Section 2A, the [Q] Conditions pursuant to Ordinances 166,216, 166,267, 179,344 shall be retained.

SECTION 3. Pursuant to Section 12.32 G of the Los Angeles Municipal Code, and any amendment thereto, the following limitations are hereby imposed upon the use of that property described in Section 1 hereof which are subject to the Permanent "D" Development Limitations. Where the zone symbols of the new zoning designation as shown in the table for Section 1, are followed by the symbol "D" in the suffix, the conditions and limitations imposed by the new "D" Development Limitation are set forth as follows:

A. All properties located within the Zone Change Ordinance Map shall be subject to the following [D] Development Limitations:

1. Height

- a. In addition to the height limitations contained in LAMC Section 12.21 A17(c), no building or structure shall exceed 30 feet in height from adjacent finished grade, measured as the vertical distance from the adjacent finished grade of the site to an imaginary plane located above and parallel to the finished grade; except that when the roof of the uppermost story of a building or structure or portion of the building or structure has a slope of less than 25 percent, the maximum height shall be 26 feet above adjacent finished grade.
- b. The finished floor elevation directly above an exposed underfloor area shall be limited to 6 feet above finished grade.
- c. Attached decks shall be limited such that no portion of the walking surface of a deck with visible underpinnings shall exceed a height of 6' above grade and decks shall be integrated into the architecture of the house, and not appear as an add-on to the primary building mass.

2. Maximum Residential Floor Area

Residential Floor Area for all lots shall be calculated as defined in Section 12.03 of the Los Angeles Municipal Code. Consistent with the definition contained therein, the first 400 square feet of covered parking area shall not be counted towards the maximum Residential Floor Area. In order to calculate the maximum Residential Floor Area permitted, a site survey showing 1-foot contours must be prepared by a licensed surveyor. The survey shall identify the total area of the lot, in square feet, according to the following slope intervals:

Area A – Slope less than 15 percent;

Area B - Slope at least 15 percent, but less than 30 percent;

Area C – Slope at least 30 percent, but less than 45 percent;

Area D – Slope at least 45 percent, but less than 60 percent;

Area E – Slope at least 60 percent, but less than 100 percent;

Area F – Slope greater than 100 percent.

For lots in the RD1.5 and RD2 Zones, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

100% of Area A + 90% of Area B + 80% of Area C + 70% of Area D + 60% of Area E + 50% of Area F.

The maximum Residential Floor Area in the RD1.5 and RD2 Zones, however, shall not be limited below 3,000 square feet.

For lots in the R2, RD3, RD4, RD5, and RD6 Zones, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

75% of Area A + 65% of Area B + 55% of Area C + 45% of Area D + 35% of Area E + 25% of Area F.

The maximum Residential Floor Area in the R2, RD3, RD4, RD5, and RD6 Zones, however, shall not be limited below 2,200 square feet.

For lots in the R1 Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

50% of Area A + 45% of Area B + 40% of Area C + 35% of Area D + 30% of Area E + 0% of Area F.

The maximum Residential Floor Area in the R1 Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater. The maximum Residential Floor Area in the R1 Zone, for lots 5,000 square feet in size with the slope entirely within Area F, however, shall not be limited below 20% of the total lot size, or 1,100 square feet, whichever is greater.

For lots in the RS Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

45% of Area A + 40% of Area B + 35% of Area C + 30% of Area D + 25% of Area E + 0% of Area F.

The maximum Residential Floor Area in the RS Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater.

For lots in the RE9 Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

40% of Area A + 35% of Area B + 30% of Area C + 25% of Area D + 20% of Area E + 0% of Area F.

The maximum Residential Floor Area in the RE9 Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater.

For lots in the RE20 Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

35% of Area A + 30% of Area B + 25% of Area C + 20% of Area D + 15% of Area E + 0% of Area F.

The maximum Residential Floor Area in the RE20 Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater.

For lots in the RE40 Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

35% of Area A + 30% of Area B + 25% of Area C + 20% of Area D + 15% of Area E + 0% of Area F.

The maximum Residential Floor Area in the RE40 Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater.

For lots in the A1 Zone, the maximum Residential Floor Area contained in all buildings and accessory structures shall be determined by the following formula:

25% of Area A + 20% of Area B + 15% of Area C + 10% of Area D + 5% of Area E + 0% of Area F.

The maximum Residential Floor Area in the A1 Zone, however, shall not be limited below 20% of the total lot size, or 1,000 square feet, whichever is greater.

For lots in the R1, RS, RE9, RE20, or RE40 Zone, if no portion of a lot exceeds a slope of 15 percent, an additional 20% of the maximum Residential Floor Area for that lot shall be allowed, consistent with Ordinance 179,883, effective June 29, 2008. Only one 20% bonus per property is allowed.

3. Residential Floor Area Bonus For Buildings Eligible for LEED® Certification

For lots in any Zone with a portion of the lot exceeding a slope of 15 percent, which are ineligible to receive the above 20% bonus in Residential Floor Area, an additional 20% of the maximum Residential Floor Area for that lot shall be allowed for the following:

New single family dwelling construction only, if the new construction is in substantial compliance with the requirements for the U.S. Green Building Council's (USGBC) Leadership in Energy and Environmental Design (LEED®) for Homes program at the "Certified" level or higher.

Prior to submitting an application to the Department of Building and Safety for a building permit, the applicant shall be required to obtain an

authorization to submit for plan check from the Department of Planning. In order to obtain this authorization, the applicant shall provide:

- (1) Documentation that the project has been registered with the USGBC's LEED® for Homes Program, and that the required fees have been paid;
- (2) A preliminary checklist from a USGBC-contracted LEED® for Homes Provider, which demonstrates that the project can be registered with the LEED® for Homes Program with a target of certification at the "Certified" or higher level;
- (3) A signed declaration from the USGBC-contracted LEED® for Homes Provider stating that the plans and plan details have been reviewed, and confirms that the project can be registered with the LEED® for Homes Program with a target certification at the "Certified" or higher level; and
- (4) A complete set of plans stamped and signed by a licensed architect or engineer that include a copy of the preliminary checklist and signed declaration identified in Subparagraphs (2) and (3) of this paragraph and identify the measures being provided for LEED® Certification. Each plan sheet must also be signed by a USGBC-contracted LEED® for Homes Provider verifying that the plans are consistent with the submitted preliminary checklist.

The Department of Building and Safety shall refer applicants to the Department of Planning prior to issuance of a building permit to obtain a clearance to verify the project compliance with the originally approved plans.

If changes are made to the project, the applicant shall be required to submit a revised set of plans, including the four requirements listed above, with all revisions necessary to make the project in substantial compliance with the requirements for LEED® Certification."

4. Verification of Existing Residential Floor Area

For additions with cumulative residential floor area of less than 500 square feet constructed after the adoption of this ordinance, or remodels of buildings built prior to the adoption of this ordinance, the existing residential floor area shall be the same as the building square footage shown on the most recent Los Angeles County Tax Assessor's records at the time the plans are submitted to the Department of Building and Safety and a plan check fee is paid. Except that residential floor area may be calculated as defined in Section 12.03 of this Code when a complete set of fully dimensioned plans with area calculations of all the structures on the lot, prepared by a licensed architect or engineer, is submitted by the applicant.

Any work that does not qualify as a remodel, as defined in the paragraph below, or additions that are 500 square feet or larger shall require a complete set of fully dimensioned plans with area calculations of all the structures on the lot prepared by a licensed architect or engineer.

File No. 08-2599

For the purposes of implementing this subdivision, a remodel shall mean the alteration of an existing building or structure provided that at least 50 percent of the perimeter length of the contiguous exterior walls and 50 percent of the roof are retained.

SECTION 4. The City Clerk shall certify to the passage of this ordinance and have it published in accordance with Council policy, either in a daily newspaper circulated in the City of Los Angeles or by posting for ten days in three public places in the City of Los Angeles: one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall; one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall East; and one copy on the bulletin board located at the Temple Street entrance to the Los Angeles County Hall of Records.

If any provision of this Ordinance or its application to any property is held to be unconstitutional or otherwise invalidated by any court of competent jurisdiction, invalidity shall not affect other Ordinance provisions, clauses or applications which can be implemented without the invalid provision, clause or application, and to this end the provisions and clauses of this Ordinance are declared to be severable.

to be severable.	
I hereby certify that this ordinance was passed at its meeting of $\underbrace{NOV~2~6~2008}$	by the Council of the City of Los Angeles
	KAREN E. KALFAYAN, City Clerk
DEC 10 2008 Approved	Deputy
Annual as to form and large!!	, iviayoi
Approved as to form and legality	
ROCKARD J. DELGADILLO, City Attorney	Pursuant to Section 559 of the City Charter, the City Planning Commission on August 14, 2008, recommended that this Ordinance be adopted by the City Council.
Ву	November 19, 2008
City Attorney	S. Gail Goldberg, AICP Director of Planning

City of Los Angeles Department of City Planning

CERTIFICATE OF COMPLETION OF INSTALLATION OF LANDSCAPE

ZONING CODE SECTION: 12.40 G

Date _		
PCIS No		Plan Check No
Discreti	ionary Case Nos:	(where applicable)
Project	Street Address:	(same as address on building permit application)
		Practitioner (12.40 D LAMC) hereby certifies that:
1.	 S/he is the certifier of the landscape documents submitted for the above pro authorized successor; and 	
2.	The landscape desc site; and	ribed by the landscape documents has been installed on the project
3.	A copy of the lands	ape documents has been provided to the owner of the project.
(printed	name of certifier)	(signature of certifier)
(license r	no., stamp, if applicable)	(contact phone no., with area code)
(printed r	name of owner/lessee)	(signature of owner/lessee) (optional)
		(contact phone no., with area code) (optional)